

Water Level Indicators (Level & Downhole)/ Mod. BFM-FF

www.pasisrl.it

WATER LEVEL INDICATORS


Water level with removable downhole indicator; with flat cable, stainless steel tape with 2 copper wires (10x2mm), coated with external anti-scratch protective film in transparent LLDPE.

Graduation in mm in black color, centimeters and decimeters are shown in black, meters are shown in red.

While lowering, the bottom sensor piston is open and when the water level is reached both red LED and buzzer turn on.

If you continue to lower the probe when it reaches the bottom the piston will close and the green LED will turn on.

- Graduation: 1mm
- Flat cable section: 10x2 mm
- Probe diameter: 25 mm (15 mm without downhole indicator), in stainless steel & plastic
- Acoustic signal and red LED indicate the water level
- Green LED indicates bottom reached (removable bottom probe)
- External regulating screw for finer regulation
- 1x9V battery, easy external access
- Optional removable hook for bailer
- Available lengths: from 50 to 300 m

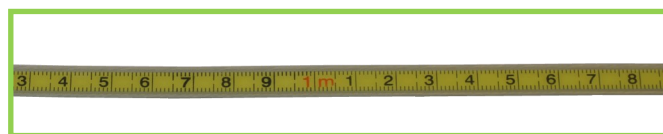

How the downhole sensor works:

OPEN see above ↗
CLOSED see below ↘

Downhole sensor Mounting Kit (included) ↓



BFM-FF AVAILABLE MODELS

model	cable length	cable reel	dimension in cm	weight	code
BFM-FF-50	50m	PVC	L25xP18xH30	2,1	FRE-071-000
BFM-FF-100	100m	PVC	L25xP18xH30	3,1	FRE-072-000
BFM-FF-150	150m	METAL	L32xP22xH37	6	FRE-073-000
BFM-FF-200	200m	METAL	L32xP22xH37	7	FRE-074-000
BFM-FF-300	300m	PVC	L49xP36xH59	14	FRE-075-000

P.A.S.I. S.R.L. — Via Galliari 5/E — 10125 Torino - Italy
tel. +39 (0)11 6507033 - sales@pasisrl.it - www.pasisrl.it

Specifications subject to change without notice

